


Specifications

Nominal Voltage		6V
Rated Capacity (20 hour rate)		245AH
Dimension	Total Height (with terminals)	275mm(10.83inches)
	Height	275mm(10.83inches)
	Length	244mm(9.61inches)
	Width	190mm(7.48inches)
Weight		Approx.32.3kg (71.21lbs)


Discharge characteristics 77°F (25°C)

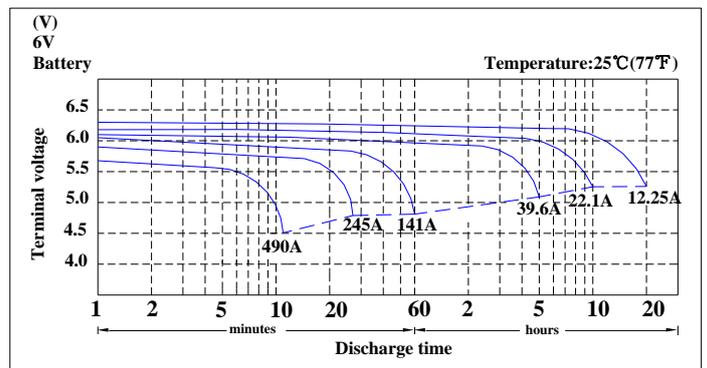

Characteristics

Capacity 77°F (25°C)	20 hour rate (12.25A to 5.25Volts)	245AH
	10 hour rate (22.1A to 5.25Volts)	221AH
	5 hour rate (39.6A to 5.10Volts)	198AH
Internal Resistance	Full charged 77°F (25°C)	1.4mΩ
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	AP	
Max. Discharge Current 77°F (25°C)	2000A (5s)	
Reserve Capacity (Minutes to 5.25V at 80°F (27°C))		@ 25Amps 457Min
		@ 75Amps 120Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 45A Or Small 7.25V~7.45V/77°F (25°C)
	Float	6.8V~6.9V/77°F (25°C)

Duration of discharge vs. Discharge current

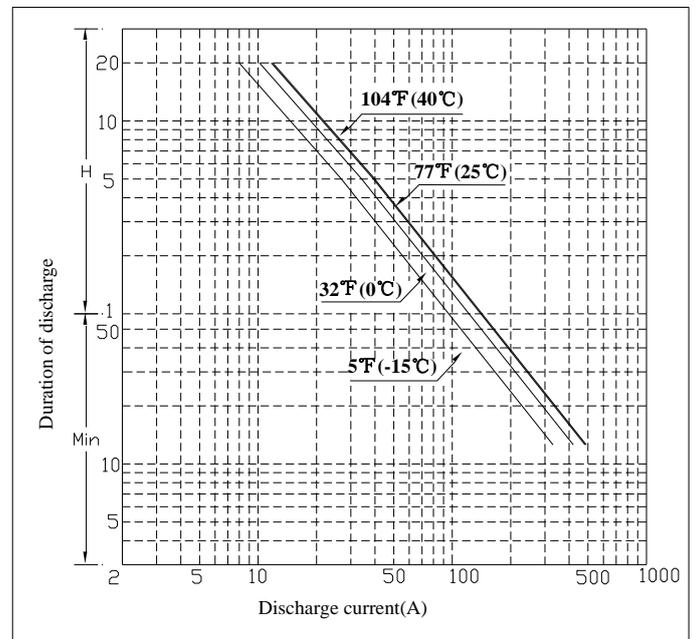

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	217.8	163.3	137.1	74.9	55.4	38.9	26.7	22.1	18.8	12.3	10.3